





TRAFFIC SIGNS SCHEDULE & INSTALLATION INSTRUCTIONS ⁽¹⁾

JOB TITLE: A3121 SAFER ROADS. SITE 11 – ERMINGTON 40MPH SIGNS & MARKING REVIEW (Draft 18/05/2022).



Site No.	Diag No.	x ht	Size m ² or Dia. mm	Reflex/lighting	Posts			Approx. ⁽⁴⁾ height to u / side	Mounting instructions ⁽⁵⁾	Illustration of sign layout or Photograph of site (optional)
					No. ⁽²⁾	Section / ⁽³⁾	Length			
1.1a	670		750	RA2	1N	89 CHS 3mm wall	3700	2300	Take down and remove to Contractor's tip 2 no back to back 600mm dia speed limit signs and post. Fix new signs 1.1a & 1.1c back to back at top of new post with sign 1b below sign 1a, ensuring minimum clearance of 600mm to edge of carriageway. Base 1100x600x600mm Cut back vegetation as necessary to ensure visibility to signs.	1a & 1b   1c 
1.1b		0.63	RA2	1800						
1c	671		750	RA2				2300		
1.2a	670		750	RA2	1E	76 CHS		2100	Take down and remove to Contractor's tip 2 no back to back 600mm dia speed limit signs. Post to remain. Fix 300mm long extension piece to top of post. Fix new signs back to back at top of extended post.	1a 
1.2b	671		750	RA2				2100		

Notes

- (1). Dimensions in mm unless otherwise stated
- (2). Suffix, N - new; E – existing, as appropriate
- (3). Post must not protrude above upper most sign except where required for mounting a lantern
- (4). Signs 95° to the carriageway unless otherwise stated; Bases L (length) x W (width) x D (depth)

TRAFFIC SIGNS SCHEDULE & INSTALLATION INSTRUCTIONS ⁽¹⁾

JOB TITLE: A3121 SAFER ROADS. SITE 11 – ERMINGTON 40MPH SIGNS & MARKING REVIEW (Draft 18/05/2022).




Site No.	Diag No.	x ht	Size m ² or Dia. mm	Reflex/lighting	Posts			Approx. ⁽⁴⁾ height to u / side	Mounting instructions ⁽⁵⁾	Illustration of sign layout or Photograph of site (optional)
					No. ⁽²⁾	Section / ⁽³⁾	Length			
2a 2b	544.1	75	750 0.26	RA2 RA2	1N	76 CHS 3mm wall	3600	2250 1500	Locate sign in verge as directed by the Engineer (approx. 45m north east of Sign 1.1 and 30m south west of access to Southley), ensuring minimum clearance of 600mm to edge of carriageway. Note also to avoid 225mm drainage pipe. Base 900x600x600mm	
3a 3b	670 670		300 300	RA2 RA2	1E	76 CHS		1500 1500	Take down and remove to Contractor's tip existing junction warning sign and 2 no back to back 40mph speed limit repeater signs. Clean sign face of bend warning sign and lower it on post by 300mm. Cut off 300mm of redundant post above sign. Fix new signs 3a & 3b back to back below existing bend warning sign.	

Notes

- (1). Dimensions in mm unless otherwise stated
- (2). Suffix, N - new; E – existing, as appropriate
- (3). Post must not protrude above upper most sign except where required for mounting a lantern
- (4). Signs 95⁰ to the carriageway unless otherwise stated; Bases L (length) x W (width) x D (depth)

TRAFFIC SIGNS SCHEDULE & INSTALLATION INSTRUCTIONS ⁽¹⁾

JOB TITLE: A3121 SAFER ROADS. SITE 11 – ERMINGTON 40MPH SIGNS & MARKING REVIEW (Draft 18/05/2022).

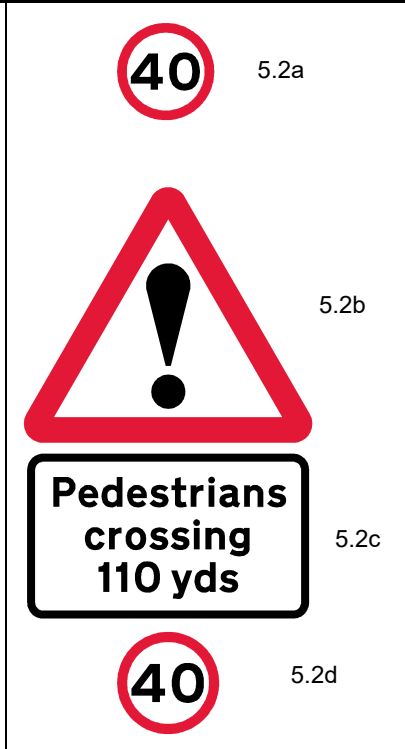
Site No.	Diag No.	x ht	Size m ² or Dia. mm	Reflex/lighting	Posts			Approx. ⁽⁴⁾ height to u / side	Mounting instructions ⁽⁵⁾	Illustration of sign layout or Photograph of site (optional)
					No. ⁽²⁾	Section / ⁽³⁾	Length			
4	2403.1	10050	1.7	RA2	2N	76 CHS 3mm wall	3100	1500	<p>Take down and remove to Contractor's tip existing 1340x340mm Ermington ¼ directions sign & 2 no posts.</p> <p>Install new sign approx. 2m in front of existing sign, ensuring minimum clearance of 600mm to edge of carriageway.</p> <p>Bases 600x600x600mm</p> <p>Posts centres 1000mm</p> <p>Cut back vegetation as necessary to ensure visibility to sign.</p>	<p>3a</p>  <p>Proposed sign</p> 
5.1									<p>Take down and remove to Contractor's tip 2 no back to back 40mph speed limit repeater signs from lamp column no 7.</p>	

Notes

- (1). Dimensions in mm unless otherwise stated
- (2). Suffix, N - new; E – existing, as appropriate
- (3). Post must not protrude above upper most sign except where required for mounting a lantern
- (4). Signs 95° to the carriageway unless otherwise stated; Bases L (length) x W (width) x D (depth)

TRAFFIC SIGNS SCHEDULE & INSTALLATION INSTRUCTIONS ⁽¹⁾

JOB TITLE: A3121 SAFER ROADS. SITE 11 – ERMINGTON 40MPH SIGNS & MARKING REVIEW (Draft 18/05/2022).




Site No.	Diag No.	x ht	Size m ² or Dia. mm	Reflex/lighting	Posts			Approx. ⁽⁴⁾ height to u / side	Mounting instructions ⁽⁵⁾	Illustration of sign layout or Photograph of site (optional)
					No. ⁽²⁾	Section / ⁽³⁾	Length			
5.2a	670	60	300	RA2	1N	76 CHS 3mm wall	3500	1250	Install new post approx. 7m in advance of lamp column no 7, to ensure a minimum clearance of 600mm between signs and edge of carriageway. Fix new sign 5.2b to top of post (facing traffic from Modbury Cross) with sign 5.2c below it. Fix new signs 5.2a & 5.2d back to back below sign 5.2c Base 600x600x600mm Cut back vegetation from in front of signs.	
5.2b	562		750	RA2				2100		
5.2c			0.40	RA2				1600		
5.2d	670		300	RA2				1250		

Notes

- (1). Dimensions in mm unless otherwise stated
- (2). Suffix, N - new; E – existing, as appropriate
- (3). Post must not protrude above upper most sign except where required for mounting a lantern
- (4). Signs 95° to the carriageway unless otherwise stated; Bases L (length) x W (width) x D (depth)

TRAFFIC SIGNS SCHEDULE & INSTALLATION INSTRUCTIONS ⁽¹⁾

JOB TITLE: A3121 SAFER ROADS. SITE 11 – ERMINGTON 40MPH SIGNS & MARKING REVIEW (Draft 18/05/2022).




Site No.	Diag No.	x ht	Size m ² or Dia. mm	Reflex/lighting	Posts			Approx. ⁽⁴⁾ height to u / side	Mounting instructions ⁽⁵⁾	Illustration of sign layout or Photograph of site (optional)
					No. ⁽²⁾	Section / ⁽³⁾	Length			
6									Take down and remove to Contractor's tip existing 780x700mm junction warning sign with yellow backing board from lamp column no 8.	
7.1		75	0.39	RA2	1E	Lamp column		2000	Fix sign to lamp column (no 9? – column ID TBC). If necessary, offset sign to right to ensure 600mm clearance to edge of carriageway.	
7.2									Take down and remove to Contractor's tip existing 1400x750mm Ermington village name plate and 2 no posts.	

Notes

- (1). Dimensions in mm unless otherwise stated
- (2). Suffix, N - new; E – existing, as appropriate
- (3). Post must not protrude above upper most sign except where required for mounting a lantern
- (4). Signs 95° to the carriageway unless otherwise stated; Bases L (length) x W (width) x D (depth)

TRAFFIC SIGNS SCHEDULE & INSTALLATION INSTRUCTIONS ⁽¹⁾

JOB TITLE: A3121 SAFER ROADS. SITE 11 – ERMINGTON 40MPH SIGNS & MARKING REVIEW (Draft 18/05/2022).




Site No.	Diag No.	x ht	Size m ² or Dia. mm	Reflex/lighting	Posts			Approx. ⁽⁴⁾ height to u / side	Mounting instructions ⁽⁵⁾	Illustration of sign layout or Photograph of site (optional)
					No. ⁽²⁾	Section / ⁽³⁾	Length			
8									Existing bend warning sign to remain.	
9									Take down and remove to Contractor's tip existing 480x480mm B & B 100yds sign from lamp column no 10.	
10									Take down and remove to Contractor's tip existing equestrians warning sign from lamp column no 11. The direction sign assembly is to be replaced as part of other works.	

Notes

- (1). Dimensions in mm unless otherwise stated
- (2). Suffix, N - new; E – existing, as appropriate
- (3). Post must not protrude above upper most sign except where required for mounting a lantern
- (4). Signs 95° to the carriageway unless otherwise stated; Bases L (length) x W (width) x D (depth)

TRAFFIC SIGNS SCHEDULE & INSTALLATION INSTRUCTIONS ⁽¹⁾

JOB TITLE: A3121 SAFER ROADS. SITE 11 – ERMINGTON 40MPH SIGNS & MARKING REVIEW (Draft 18/05/2022).





Site No.	Diag No.	x ht	Size m ² or Dia. mm	Reflex/lighting	Posts			Approx. ⁽⁴⁾ height to u / side	Mounting instructions ⁽⁵⁾	Illustration of sign layout or Photograph of site (optional)
					No. ⁽²⁾	Section / ⁽³⁾	Length			
11	622.2		600	RA2	1N	76 CHS 3mm wall	2600	1400	Locate sign in verge, ensuring minimum clearance of 450mm to edge of carriageway. Base 450x450x600mm	
12	675		0.51	RA2	1E	76		See right	Take down and remove to Contractor's tip existing 40mph limit / 20mph Zone End sign. 20mph Zone sign to remain. Fix new sign back to back with existing 20mph Zone sign to remain.	
13	675		0.51	RA2	1E	76		See right	Take down and remove to Contractor's tip existing 40mph limit / 20mph Zone End sign. 20mph Zone sign to remain. Fix new sign back to back with existing 20mph Zone sign to remain.	

Notes

- (1). Dimensions in mm unless otherwise stated
- (2). Suffix, N - new; E – existing, as appropriate
- (3). Post must not protrude above upper most sign except where required for mounting a lantern
- (4). Signs 95° to the carriageway unless otherwise stated; Bases L (length) x W (width) x D (depth)

TRAFFIC SIGNS SCHEDULE & INSTALLATION INSTRUCTIONS ⁽¹⁾

JOB TITLE: A3121 SAFER ROADS. SITE 11 – ERMINGTON 40MPH SIGNS & MARKING REVIEW (Draft 18/05/2022).





Site No.	Diag No.	x ht	Size m ² or Dia. mm	Reflex/lighting	Posts			Approx. ⁽⁴⁾ height to u / side	Mounting instructions ⁽⁵⁾	Illustration of sign layout or Photograph of site (optional)
					No. ⁽²⁾	Section / ⁽³⁾	Length			
14	601.1		750	RA2	1E	76 CHS		See right	Take down and remove to Contractor's tip existing 700x700mm STOP sign on yellow backing board. 7.5T weight restriction sign to remain. Fix new sign back to back with eight restriction sign.	
15a	670		300	RA2	1E	Lamp column		2250*	Take down and remove to Contractor's tip 2 no back to back 40mph speed limit repeater signs from lamp column no 12. Fix new signs 15a & 15 back to back on lamp column, 450mm higher than the 'old' signs (to be visible above parked vehicles). Cut back vegetation from in front of signs.	15a  15b 
15b	670		300	RA2				2250*		
16	516.1 550.1		1.60	RA2	1N	89 CHS 3mm wall	3800	1500	Take down and remove to Contractor's tip existing junction warning sign on yellow backing board and post. Install new post in same location and offset sign to left, ensuring minimum 450mm clearance to edge of carriageway. Trim back vegetation to ensure 60m visibility to sign. Base 1200x600x600mm	

Notes

- (1). Dimensions in mm unless otherwise stated
- (2). Suffix, N - new; E – existing, as appropriate
- (3). Post must not protrude above upper most sign except where required for mounting a lantern
- (4). Signs 95° to the carriageway unless otherwise stated; Bases L (length) x W (width) x D (depth)

TRAFFIC SIGNS SCHEDULE & INSTALLATION INSTRUCTIONS ⁽¹⁾

JOB TITLE: A3121 SAFER ROADS. SITE 11 – ERMINGTON 40MPH SIGNS & MARKING REVIEW (Draft 18/05/2022).

Site No.	Diag No.	x ht	Size m ² or Dia. mm	Reflex/lighting	Posts			Approx. ⁽⁴⁾ height to u / side	Mounting instructions ⁽⁵⁾	Illustration of sign layout or Photograph of site (optional)
					No. ⁽²⁾	Section / ⁽³⁾	Length			
17	516.1 550.1		1.60	RA2	1N	89 CHS 3mm wall	3800	1500	Locate sign in verge 33m in advance of sign 16, ensuring minimum clearance of 450mm to edge of carriageway. Base 600x600x600mm	
18a 18b	670 670		300 300	RA2 RA2	1E	76 CHS		1600 1600	Take down and remove to Contractor's tip 2 no existing back to back 40mph speed limit repeater signs. Post to remain. Fix new signs back to back at top of existing post.	18a  18b 
19									Take down and remove to Contractor's tip existing 480x480mm B & B 1/3 mile sign and post.	

Notes

- (1). Dimensions in mm unless otherwise stated
- (2). Suffix, N - new; E – existing, as appropriate
- (3). Post must not protrude above upper most sign except where required for mounting a lantern
- (4). Signs 95° to the carriageway unless otherwise stated; Bases L (length) x W (width) x D (depth)

TRAFFIC SIGNS SCHEDULE & INSTALLATION INSTRUCTIONS ⁽¹⁾

JOB TITLE: A3121 SAFER ROADS. SITE 11 – ERMINGTON 40MPH SIGNS & MARKING REVIEW (Draft 18/05/2022).

Site No.	Diag No.	x ht	Size m ² or Dia. mm	Reflex/lighting	Posts			Approx. ⁽⁴⁾ height to u / side	Mounting instructions ⁽⁵⁾	Illustration of sign layout or Photograph of site (optional)
					No. ⁽²⁾	Section / ⁽³⁾	Length			
20a		75	0.91	RA2	3E	76		See right	Take down and remove to Contractor's tip 2 no back to back 1320x870mm Ermington / Ivybridge direction signs and 3920x610mm Ugborough / Exeter & Yealmpton / Plymouth direction sign. Posts to remain. Fix new signs 20a & 20b back to back at top of posts perpendicular to the road, offset towards to road to maximise visibility to them. Fix sign 20c below them, so that it is at the top of the shorter left-hand post. Cut back vegetation to maximise visibility to signs.	
20b		75	0.92	RA2						
20c		75	2.22	RA2						
					<p>PLEASE NOTE: Sign 20c is to be made a minimum 2970mm wide so that it can be fixed to the existing posts located at 2680mm centre to centre.</p>					
21a	674	40	0.60	RA2	1E	76 CHS		See right	Take down and remove to Contractor's tip existing 20mph Zone sign and 40mph / 20mph Zone End sign. Post to remain. Fix new signs back to back at top of post, offset as existing signs. Trim vegetation from in front of signs.	
21b	675		0.51	RA2						

Notes

- (1). Dimensions in mm unless otherwise stated
- (2). Suffix, N - new; E – existing, as appropriate
- (3). Post must not protrude above upper most sign except where required for mounting a lantern
- (4). Signs 95^o to the carriageway unless otherwise stated; Bases L (length) x W (width) x D (depth)

TRAFFIC SIGNS SCHEDULE & INSTALLATION INSTRUCTIONS ⁽¹⁾

JOB TITLE: A3121 SAFER ROADS. SITE 11 – ERMINGTON 40MPH SIGNS & MARKING REVIEW (Draft 18/05/2022).



Site No.	Diag No.	x ht	Size m ² or Dia. mm	Reflex/lighting	Posts			Approx. ⁽⁴⁾ height to u / side	Mounting instructions ⁽⁵⁾	Illustration of sign layout or Photograph of site (optional)
					No. ⁽²⁾	Section / ⁽³⁾	Length			
24a 24b 24c 24d	506.1A 670 670	90	750 300 0.58 300	RA2 RA2 RA2 RA2	1E	76 CHS		See right Take down and remove to Contractor's tip existing 600mm junction warning sign and 2 no 300mm 40mph repeater signs. Post to remain. Fix new signs 24a and 24c back to back at top of post with signs 24b & 24d back to back below them.		
25.1	2403.1	100 50	1.7	RA2	2N	76 CHS	4300	2500	<p>Locate sign in playing field 30m from steps, set back 0.6m from wall.</p> <p>Planted bases 450x450x800mm.</p> <p>Post centres 850mm.</p>	

Notes

- (1). Dimensions in mm unless otherwise stated
- (2). Suffix, N - new; E – existing, as appropriate
- (3). Post must not protrude above upper most sign except where required for mounting a lantern
- (4). Signs 95° to the carriageway unless otherwise stated; Bases L (length) x W (width) x D (depth)

TRAFFIC SIGNS SCHEDULE & INSTALLATION INSTRUCTIONS ⁽¹⁾

JOB TITLE: A3121 SAFER ROADS. SITE 11 – ERMINGTON 40MPH SIGNS & MARKING REVIEW (Draft 18/05/2022).







Site No.	Diag No.	x ht	Size m ² or Dia. mm	Reflex/lighting	Posts			Approx. ⁽⁴⁾ height to u / side	Mounting instructions ⁽⁵⁾	Illustration of sign layout or Photograph of site (optional)
					No. ⁽²⁾	Section / ⁽³⁾	Length			
25.2	544.2 562 563	75	2.04	RA2	1N	89 CHS 3mm wall	3800	1000	<p>Take down and remove to Contractor's tip existing 600mm vulnerable pedestrians sign, 750mm flood warning sign, 790x360mm plate and 76mm post.</p> <p>Locate new post against wall in same location.</p> <p>Base 600x600x600mm</p> <p>Cut back vegetation in front of sign.</p>	
26a 26b	544.1	75	750 0.26	RA2 RA2	1E	76 CHS		See right	<p>Take down and remove to Contractor's tip existing 850x1370mm junction warning sign and reduce speed now plate.</p> <p>76mm dia post to remain.</p> <p>Fix new signs to top of existing post.</p>	

Notes

- (1). Dimensions in mm unless otherwise stated
- (2). Suffix, N - new; E – existing, as appropriate
- (3). Post must not protrude above upper most sign except where required for mounting a lantern
- (4). Signs 95° to the carriageway unless otherwise stated; Bases L (length) x W (width) x D (depth)

TRAFFIC SIGNS SCHEDULE & INSTALLATION INSTRUCTIONS ⁽¹⁾

JOB TITLE: A3121 SAFER ROADS. SITE 11 – ERMINGTON 40MPH SIGNS & MARKING REVIEW (Draft 18/05/2022).




Site No.	Diag No.	x ht	Size m ² or Dia. mm	Reflex/lighting	Posts			Approx. ⁽⁴⁾ height to u / side	Mounting instructions ⁽⁵⁾	Illustration of sign layout or Photograph of site (optional)	
					No. ⁽²⁾	Section / ⁽³⁾	Length				
27a	670		300	RA2	1E	60 CHS		1500	Take down and remove to Contractor's tip 2 no back to back 40mph speed limit repeater signs. Post to remain.	27a 	27b 
27b	670		300	RA2							
28									Existing finger post sign to remain. Cut back vegetation from in front of sign.		
29									Clean sign face of existing give way sign and 7.5t weight limit sign.		
30a	671		600	RA2	1E	76 CHS		See right	Take down and remove to Contractor's tip existing 450mm dia speed limit terminal signs. Post to remain.		
30b	670		600	RA2							

Notes

- (1). Dimensions in mm unless otherwise stated
- (2). Suffix, N - new; E – existing, as appropriate
- (3). Post must not protrude above upper most sign except where required for mounting a lantern
- (4). Signs 95° to the carriageway unless otherwise stated; Bases L (length) x W (width) x D (depth)

TRAFFIC SIGNS SCHEDULE & INSTALLATION INSTRUCTIONS ⁽¹⁾

JOB TITLE: A3121 SAFER ROADS. SITE 11 – ERMINGTON 40MPH SIGNS & MARKING REVIEW (Draft 18/05/2022).

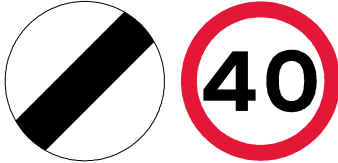


Site No.	Diag No.	x ht	Size m ² or Dia. mm	Reflex/lighting	Posts			Approx. ⁽⁴⁾ height to u / side	Mounting instructions ⁽⁵⁾	Illustration of sign layout or Photograph of site (optional)
					No. ⁽²⁾	Section / ⁽³⁾	Length			
31a	671		600	RA2	1E	76 CHS		See right	Take down and remove to Contractor's tip existing 450mm dia speed limit terminal signs. Post to remain. Fix new signs back to back at top of existing post.	
31b	670		600	RA2						
32	544.2		0.64	RA2	1E	76 CHS 3mm wall	3500	2100	Install post in field against wall, clear from tree canopy (approx. 24m from sign 34). Offset sign to the right towards the carriageway. Base 450x450x600mm	
33									Take down and remove to Contractor's tip existing 'elderly' people warning sign, supplementary plate & post.	

Notes

- (1). Dimensions in mm unless otherwise stated
- (2). Suffix, N - new; E – existing, as appropriate
- (3). Post must not protrude above upper most sign except where required for mounting a lantern
- (4). Signs 95° to the carriageway unless otherwise stated; Bases L (length) x W (width) x D (depth)

TRAFFIC SIGNS SCHEDULE & INSTALLATION INSTRUCTIONS ⁽¹⁾

JOB TITLE: A3121 SAFER ROADS. SITE 11 – ERMINGTON 40MPH SIGNS & MARKING REVIEW (Draft 18/05/2022).


Site No.	Diag No.	x ht	Size m ² or Dia. mm	Reflex/lighting	Posts			Approx. ⁽⁴⁾ height to u / side	Mounting instructions ⁽⁵⁾	Illustration of sign layout or Photograph of site (optional)
					No. ⁽²⁾	Section / ⁽³⁾	Length			
34a	671		750	RA2	1E	76 CHS		See right	Take down and remove to Contractor's tip existing 600mm dia speed limit terminal signs. Post to remain. Fix new signs back to back at top of existing post.	
34b	670		750	RA2						
35a	671		750	RA2	1E & 1N	76 CHS 76 CHS 3mm wall	2400	See right	Take down and remove to Contractor's tip existing 600mm dia speed limit terminal signs. Existing post to remain. Install new post in field offset 800mm from existing post. Fix signs 35a and 35b back to back at top of existing post. Fix sign 35c to new & existing post, below sign 35b. Cut back vegetation to ensure visibility to sign. Base 600x600x600mm	Sign 35a  Sign 35b & 35c 
35b	670		750	RA2						
35c	2402.1		0.72	RA2						

Notes

- (1). Dimensions in mm unless otherwise stated
- (2). Suffix, N - new; E – existing, as appropriate
- (3). Post must not protrude above upper most sign except where required for mounting a lantern
- (4). Signs 95° to the carriageway unless otherwise stated; Bases L (length) x W (width) x D (depth)

TRAFFIC SIGNS SCHEDULE & INSTALLATION INSTRUCTIONS ⁽¹⁾

JOB TITLE: A3121 SAFER ROADS. SITE 11 – ERMINGTON 40MPH SIGNS & MARKING REVIEW (Draft 18/05/2022).

Site No.	Diag No.	x ht	Size m ² or Dia. mm	Reflex/lighting	Posts			Approx. ⁽⁴⁾ height to u / side	Mounting instructions ⁽⁵⁾	Illustration of sign layout or Photograph of site (optional)
					No. ⁽²⁾	Section / ⁽³⁾	Length			
36a	562		750	RA2	1N	76 CHS 3mm wall	3300	1950	Take down and remove to Contractor's tip existing 750mm warning sign, 790x360mm Road liable to flooding plate and post. Install new sign in same location. Base 600x600x600mm	
36b	563	75	0.41	RA2				1500		

Notes

- (1). Dimensions in mm unless otherwise stated
- (2). Suffix, N - new; E – existing, as appropriate
- (3). Post must not protrude above upper most sign except where required for mounting a lantern
- (4). Signs 95⁰ to the carriageway unless otherwise stated; Bases L (length) x W (width) x D (depth)